


# PRODUCT SPECIFICATIONS

## Flash Check®

### Jumbo Display Auto-Cal Needle Probe Thermometer

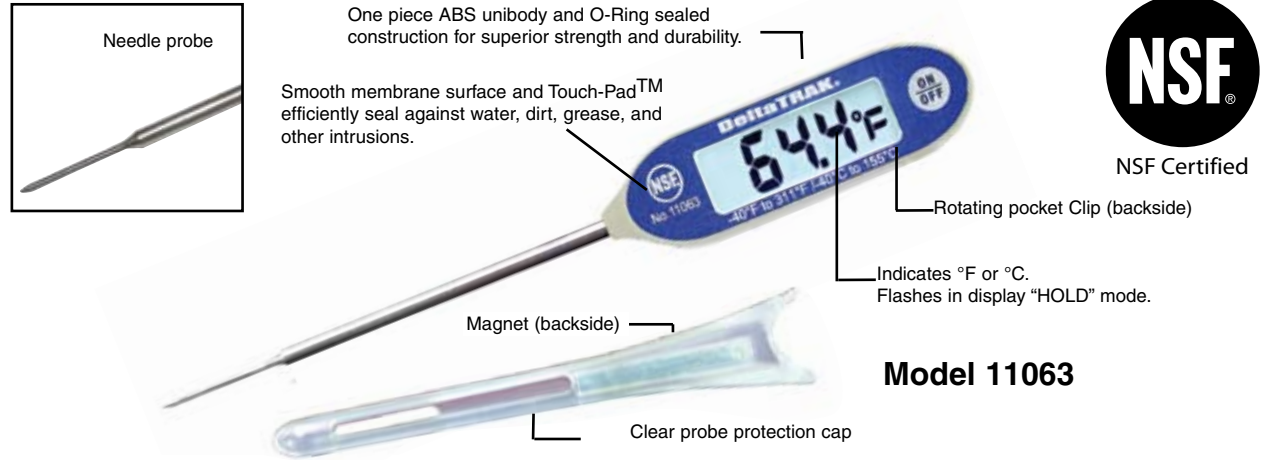

**Model 11063**

This unique, next-generation, Needle Probe Thermometer is engineered to set the industry standard for accuracy, durability and readability. It is designed and constructed under exacting standards to meet and exceed specifications required for commercial and professional uses.

- New "Auto-Calibration" feature
- Needle probe thermometer provides fastest response time
- Small-diameter needle probe ideal for measuring temperature of "thin mass" food such as meat patties, chicken, and fish fillets per FDA Food Code 4-302.12(B)
- Sealed unibody construction and RoHS-compliant
- IP56 waterproof & grease resistant

PATENT NO. 5,709,476  
5,801,968



Measurement Range	-40°F to 311°F (-40°C to 155°C)
Accuracy	1.0°F (-4°F to 113°F) ±0.5°C (-20°C to 45°C); otherwise ±1.8°F (±1.0°C)
Response Time	Less than 5 seconds (0°C to 25°C/32°F to 77°F)
Resolution	0.1°(F or C)
Display Size/Update	1.5" x 0.5" (38mm x 12.7mm)/Every 2 Seconds
Waterproof Rating	IP56
Probe Length and Tip Diameter	Stainless steel probe, length 3.90 +/- 0.004 in. (99 +/- 0.1mm); Needle probe 0.067 in. (1.7mm) dia.
Body	ABS plastic
Factory Calibration	NIST traceable calibration certified
Compliance Certificate	Manufacturers certificate of compliance available from DeltaTRAK, NIST Traceable, NSF, CE
Battery	1.5V

DeltaTRAK manufactures products under an ISO 9000 registered quality management system

20090817 Rev. 4.0



**1-800-962-6776**

**• www.deltatruk.com**

P.O. Box 398 • Pleasanton, CA 94566 • Tel: (925) 249-2250 • Fax: (925) 249-2251